




## DO-201AD

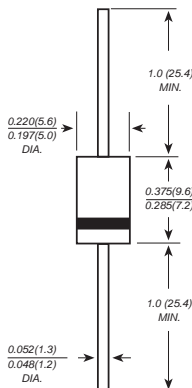

Dimensions in inches and (millimeters)

## FEATURES

- ◆ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ◆ Fast switching for high efficiency
- ◆ Low reverse leakage
- ◆ High forward surge current capability
- ◆ High temperature soldering guaranteed:
  - ◆ 250°C/10 seconds, 0.375" (9.5mm) lead length, 5 lbs. (2.3kg) tension

## MECHANICAL DATA

**Case:** JEDEC DO-201AD molded plastic body**Terminals:** Plated axial leads, solderable per MIL-STD-750, Method 2026**Polarity:** Color band denotes cathode end**Mounting Position:** Any**Weight:** 0.04 ounce, 1.10 grams

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

|  | SYMBOLS                           | FR 301       | FR 302 | FR 303 | FR 304 | FR 305 | FR 306 | FR 307 | UNITS |
|--|-----------------------------------|--------------|--------|--------|--------|--------|--------|--------|-------|
| Maximum repetitive peak reverse voltage  | V <sub>RRM</sub>                  | 50           | 100    | 200    | 400    | 600    | 800    | 1000   | VOLTS |
| Maximum RMS voltage  | V <sub>RMS</sub>                  | 35           | 70     | 140    | 280    | 420    | 560    | 700    | VOLTS |
| Maximum DC blocking voltage  | V <sub>DC</sub>                   | 50           | 100    | 200    | 400    | 600    | 800    | 1000   | VOLTS |
| Maximum average forward rectified current<br>0.375" (9.5mm) lead length at T <sub>A</sub> =75°C              | I <sub>(AV)</sub>                 | 3.0          |        |        |        |        |        |        | Amps  |
| Peak forward surge current<br>8.3ms single half sine-wave superimposed on<br>rated load (JEDEC Method)       | I <sub>FSM</sub>                  | 200.0        |        |        |        |        |        |        | Amps  |
| Maximum instantaneous forward voltage at 3.0A  | V <sub>F</sub>                    | 1.3          |        |        |        |        |        |        | Volts |
| Maximum DC reverse current     T <sub>A</sub> =25°C<br>at rated DC blocking voltage    T <sub>A</sub> =100°C | I <sub>R</sub>                    | 5.0<br>100.0 |        |        |        |        |        |        | mA    |
| Maximum reverse recovery time     (NOTE 1)   | t <sub>rr</sub>                   | 150          |        |        |        | 250    | 500    |        | ns    |
| Typical junction capacitance (NOTE 2)  | C <sub>J</sub>                    | 60.0         |        |        |        |        |        |        | pF    |
| Typical thermal resistance (NOTE 3)  | R <sub>qJA</sub>                  | 20.0         |        |        |        |        |        |        | °C/W  |
| Operating junction and storage temperature range   | T <sub>J</sub> , T <sub>STG</sub> | -65 to +150  |        |        |        |        |        |        | °C    |

**Note:** 1. Reverse recovery condition  $I_F=0.5A, I_R=1.0A, I_{rr}=0.25A$ 

2. Measured at 1MHz and applied reverse voltage of 4.0V D.C.

3. Thermal resistance from junction to ambient at 0.375" (9.5mm) lead length, P.C.B. mounted



FIG. 1- FORWARD CURRENT DERATING CURVE

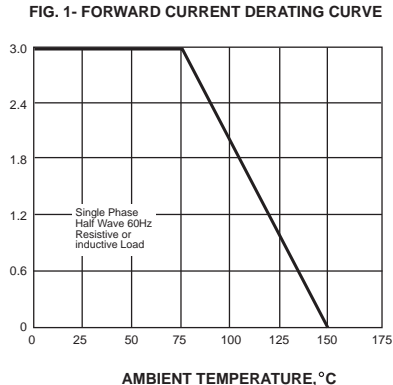


FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

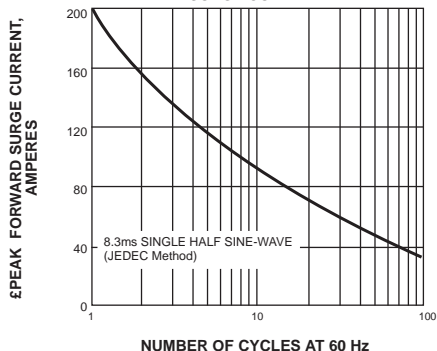


FIG. 3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

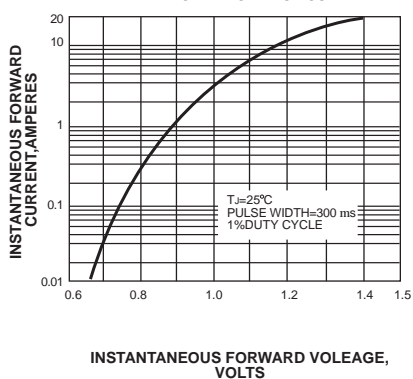


FIG. 4-TYPICAL REVERSE CHARACTERISTICS

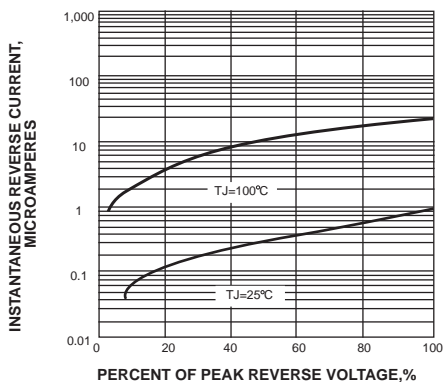


FIG. 5-TYPICAL JUNCTION CAPACITANCE

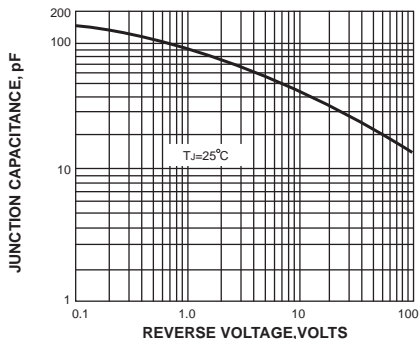


FIG. 6-TYPICAL TRANSIENT THERMAL IMPEDANCE

