

Dimensions in inches and (millimeters)

Package: GBU

FEATURES

- Surge overload rating -220~350 amperes peak
- Ideal for printed circuit board
- Reliable low cost construction utilizing molded plastic technique
- flammability classification 94V-0
- Mounting position: Any
- Weight: 0.134 ounces , 3.79 grams

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified. Single phase, half wave ,60Hz, resistive or inductive load. For capacitive load, derate current by 20%

CHARACTERISTICS	SYMBOL	GBU 10005 15005 25005	GBU 1001 1501 2501	GBU 1002 1502 2502	GBU 1004 1504 2504	GBU 1006 1506 2506	GBU 1008 1508 2508	GBU 1010 1510 2510	UNIT
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V _{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V _{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward (with heatsink Note 2) Rectified Current @ T _C =100℃ (without heatsink)	I _(AV)	GBU 10	10 3.0	GBU 15	15 3.2	GBU 25	25 4.2	A	
Peak Forward Surge Current 8.3ms Single Half Sine-Wave Super Imposed on Rated Load (JEDEC Method)	I _{FSM}		220		240		350	A	
Maximum Forward Voltage at 5.0/7.5/12.5A DC	V _F		1.1						V
Maximum DC Reverse Current @ T _J =25℃ at Rated DC Blocking Voltage @ T _J =125℃	I _R	10.0 500						uA	
I ² t Rating for Fusing (t<8.3ms)	I ² t	200						A ² s	
Typical Junction Capacitance Per Element (Note1)	C _J	70						pF	
Typical Thermal Resistance (Note2)	R _{θJC}	2.2						℃/W	
Operating Temperature Range	T _J	-55 to +150						℃	
Storage Temperature Range	T _{STG}	-55 to +150						℃	

NOTES: 1. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.

2. Device mounted on 100mm*100mm*1.6mm cu plate heatsink.



FIG.1-MAXIMUM FORWARD SURGE CURRENT

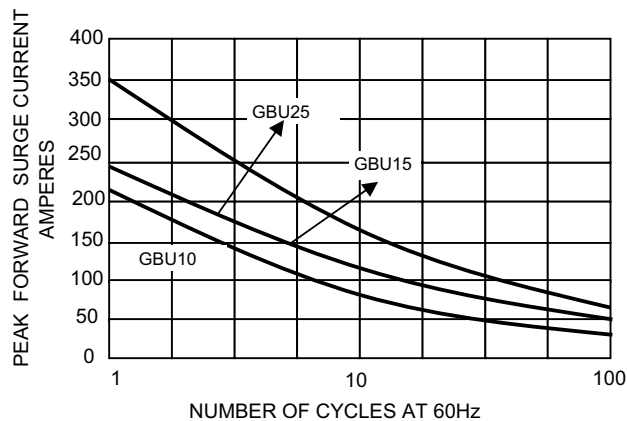


FIG.2- DERATING CURVE
OUTPUT RECTIFIED CURRENT

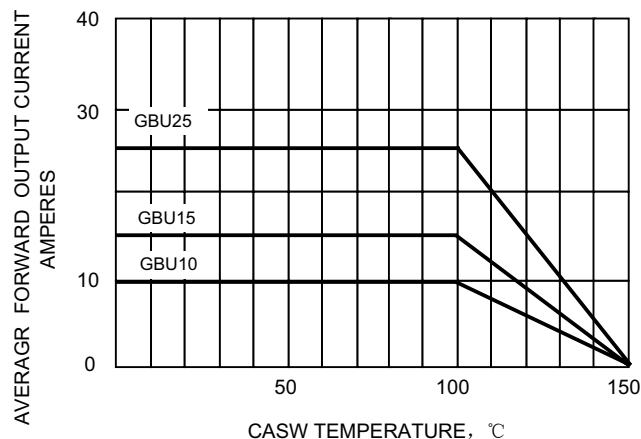


FIG.3-TYPICAL FORWARD
CHARACTERISTICS

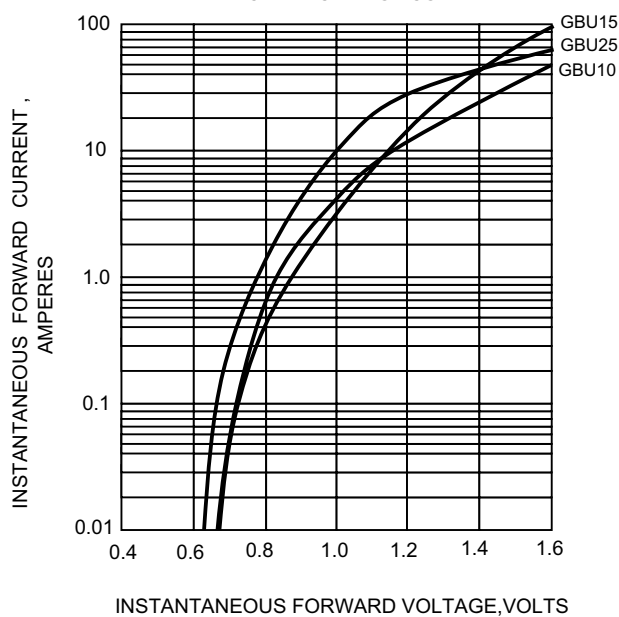


FIG.4-TYPICAL REVERSE
CHARACTERISTICS

