



Uni-direction ESD Protection Diode

DESCRIPTION


Designed to protect voltage sensitive electronic components from ESD and other transients. Excellent clamping capability, low leakage, and fast response time provide best in class protection on designs that are exposed to ESD.

The combination of small size, and high level of ESD protection makes them a flexible solution for applications such as HDMI, Display Port TM, and MDDI interfaces. It is designed to replace multiplayer varistors (MLV) in consumer equipments applications such as mobile phone, notebook, PAD, STB, LCD TV etc.

FEATURES

- Uni-directional ESD protection of one line
- Reverse stand-off voltage: 7V
- Low reverse clamping voltage
- Low leakage current
- Excellent package: 1.60mm × 0.80mm × 0.50mm
- Fast response time
- JESD22-A114-B ESD Rating of class 3B per human body model
- IEC 61000-4-2 Level 4 ESD protection

WBFBP-02L



APPLICATIONS

- Computers and peripherals
- Digital Cameras
- Audio and video equipment
- Cellular handsets and accessories
- Portable electronics
- Power supply protection
- Other electronics equipments communication systems

MARKING



Q7 = Device code

The marking bar indicates the cathode

Front side

MAXIMUM RATINGS ($T_a=25^\circ\text{C}$ unless otherwise noted)

| Parameter | Symbol | Limit | Unit |
|--|-----------------|------------|------|
| IEC 61000-4-2 ESD Voltage | $V_{ESD}^{(1)}$ | ± 25 | kV |
| Contact Model | | ± 25 | |
| JESD22-A114-B ESD Voltage | | ± 16 | |
| Per Human Body Model | | ± 0.4 | |
| ESD Voltage | Machine Model | | |
| Peak Pulse Power | $P_{PP}^{(2)}$ | 1040 | W |
| Peak Pulse Current | $I_{PP}^{(2)}$ | 65 | A |
| Lead Solder Temperature – Maximum (10 Second Duration) | T_L | 260 | °C |
| Junction Temperature | T_j | 150 | °C |
| Storage Temperature Range | T_{stg} | -55 ~ +150 | °C |

(1).Device stressed with ten non-repetitive ESD pulses.

(2).Non-repetitive current pulse 8/20μs exponential decay waveform according to IEC61000-4-5.


ESD standards compliance

IEC61000-4-2 Standard


| Contact Discharge | | Air Discharge | |
|-------------------|-----------------|---------------|-----------------|
| Level | Test Voltage kV | Level | Test Voltage kV |
| 1 | 2 | 1 | 2 |
| 2 | 4 | 2 | 4 |
| 3 | 6 | 3 | 8 |
| 4 | 8 | 4 | 15 |

JESD22-A114-B Standard

| ESD Class | Human Body Discharge V |
|-----------|------------------------|
| 0 | 0~249 |
| 1A | 250~499 |
| 1B | 500~999 |
| 1C | 1000~1999 |
| 2 | 2000~3999 |
| 3A | 4000~7999 |
| 3B | 8000~15999 |

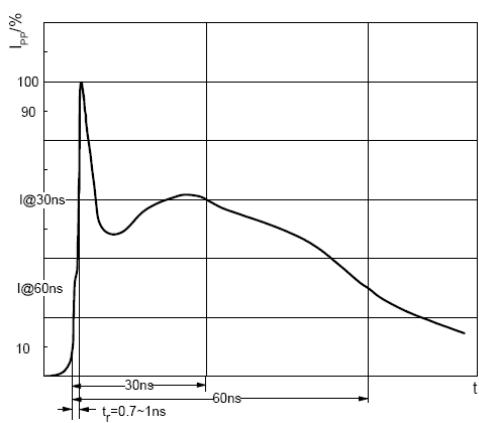


ESD pulse waveform according to IEC61000-4-2

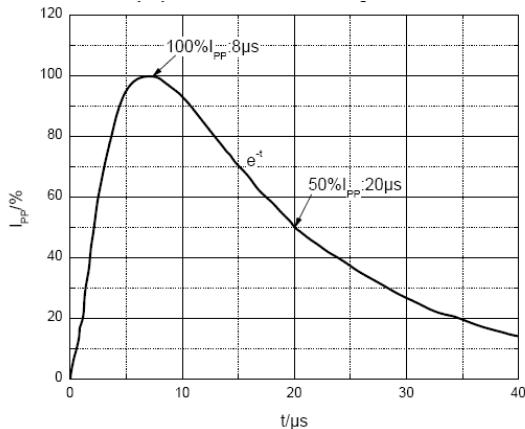

8/20μs pulse waveform according to IEC 61000-4-5

ELECTRICAL PARAMETER

| Symbol | Parameter |
|-----------|-------------------------------------|
| V_C | Clamping Voltage @ I_{PP} |
| I_{PP} | Peak Pulse Current |
| V_{BR} | Breakdown Voltage @ I_T |
| I_T | Test Current |
| I_R | Reverse Leakage Current @ V_{RWM} |
| V_{RWM} | Reverse Standoff Voltage |
| V_F | Forward Voltage@ I_F |
| I_F | Forward Current |

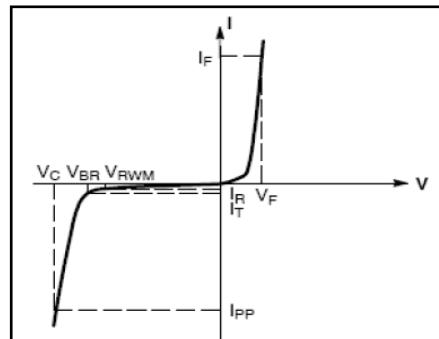

V-I characteristics for a uni-directional TVS

ELECTRICAL CHARACTERISTICS($T_a=25^\circ C$ unless otherwise specified)

| Parameter | Symbol | Test conditions | Min | Typ | Max | Unit |
|---------------------------|-----------------|------------------|------|-----|------|---------|
| Reverse stand off voltage | $V_{RWM}^{(1)}$ | | | | 7 | V |
| Reverse leakage current | I_R | $V_{RWM}=7V$ | | | 1 | μA |
| Breakdown voltage | $V_{(BR)}$ | $I_T=1mA$ | 7.7 | | 10.0 | V |
| Clamping voltage | $V_C^{(2)}$ | $I_{PP}=65A$ | | | 16 | V |
| Forward voltage | V_F | $I_F=20mA$ | 0.45 | | 1.25 | V |
| Junction capacitance | C_J | $V_R=0V, f=1MHz$ | | | 500 | pF |


(1).Other voltages available upon request.

(2).Non-repetitive current pulse 8/20 μs exponential decay waveform according to IEC61000-4-5





TYPICAL CHARACTERISTICS


Forward Characteristics

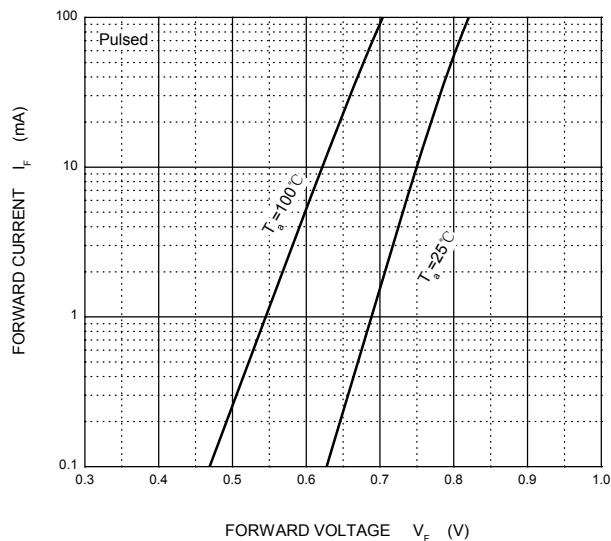


Reverse Characteristics

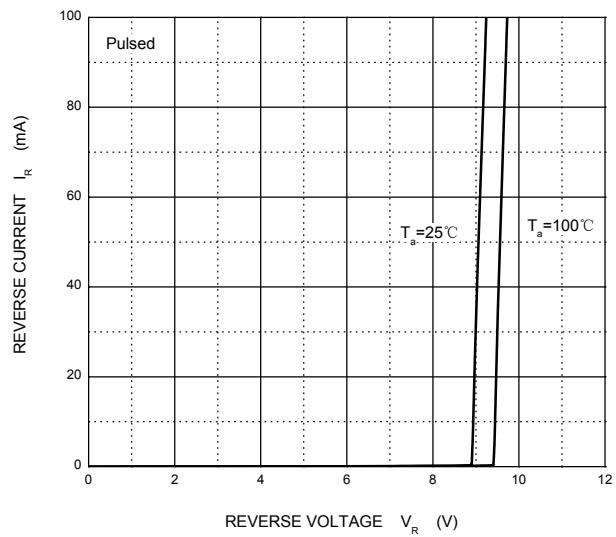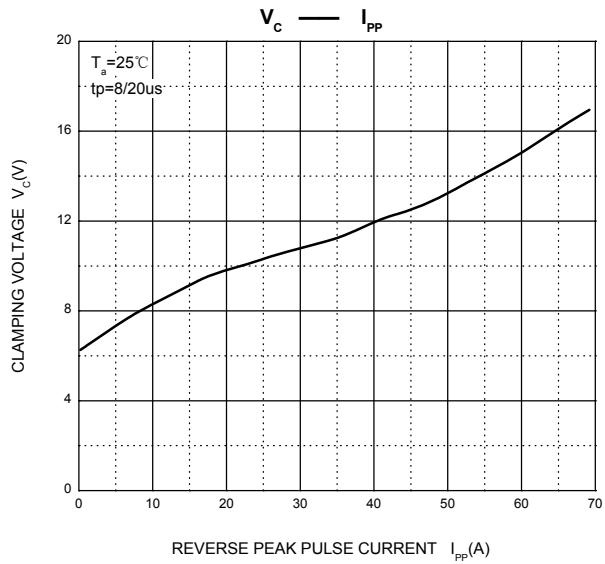
 V_c — I_{PP} 

Capacitance Characteristics

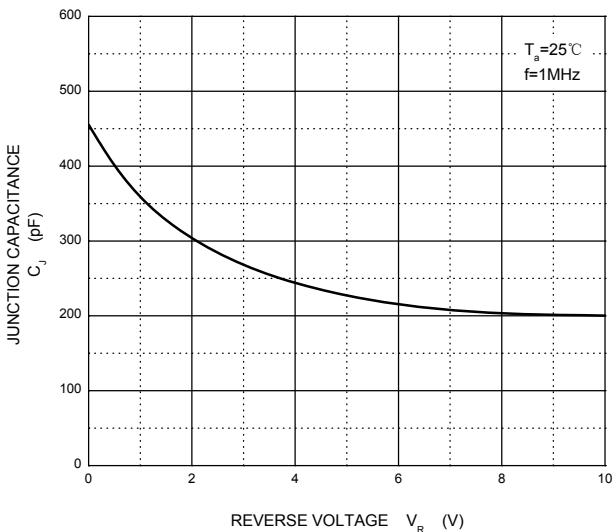

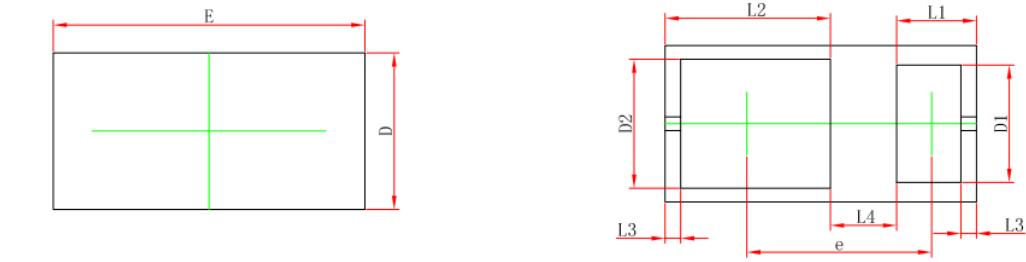PACKAGE OUTLINE AND PAD LAYOUT INFORMATION
WBFBP-02L Package Outline Dimensions


| Symbol | Dimensions In Millimeters | | Dimensions In Inches | |
|--------|---------------------------|-------|----------------------|-------|
| | Min. | Max. | Min. | Max. |
| A | 0.450 | 0.550 | 0.018 | 0.022 |
| A1 | 0.010 | 0.090 | 0.000 | 0.004 |
| D | 0.750 | 0.850 | 0.030 | 0.033 |
| D1 | 0.520 | 0.680 | 0.020 | 0.027 |
| D2 | 0.600 | 0.760 | 0.024 | 0.030 |
| E | 1.550 | 1.650 | 0.061 | 0.065 |
| L1 | 0.410 REF. | | 0.016 REF. | |
| L2 | 0.850 REF. | | 0.033 REF. | |
| L3 | 0.080 REF. | | 0.003 REF. | |
| L4 | 0.340 REF. | | 0.013 REF. | |
| e | 0.900 | 1.000 | 0.035 | 0.039 |

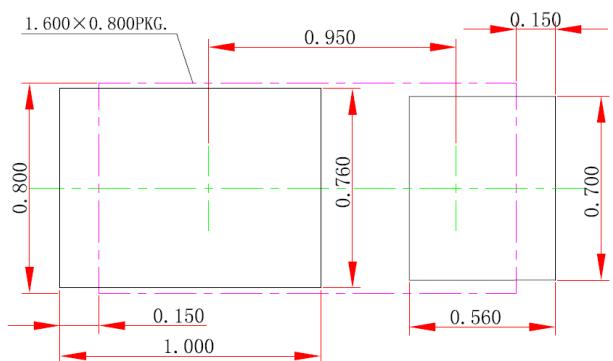WBFBP-02L Suggested Pad Layout

Note:

1. Controlling dimension: in millimeters.
2. General tolerance: $\pm 0.050\text{mm}$.
3. The pad layout is for reference purposes only.