





FEATURES

- Low profile surface mount package
- Built in strain relief
- High switching speed
- Low voltage drop, high efficiency
- For use in low voltage high frequency inverters, Free willing ,and polarity protection applications
- Guardring for over voltage protection

MECHANICAL DATA

- Case: Transfer molded plastic
- Epoxy: UL 94V-0 rate flame retardant
- Lead :Solder plated, solderable per MIL-STD-750 method 2026
- Polarity: Color band denotes cathode end
- Weight: 0.003 ounce, 0.093 gram

DO-214AC(SMA)

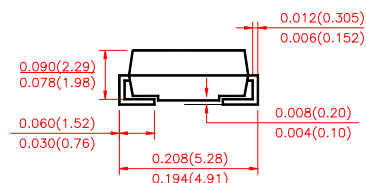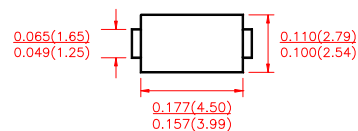

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Ratings at 25°C ambient temperature unless otherwise specified.
- Single phase, half wave, 60Hz, resistive or inductive load.
- For capacitive load derate current by 20%.


		SYMBOLS	SS 22A	SS 23A	SS 24A	SS 25A	SS 26A	SS 28A	SS 29A	SS 210A	UNIT
Maximum Repetitive Peak Reverse Voltage		V _{RRM}	20	30	40	50	60	80	90	100	Volts
Maximum RMS Voltage		V _{RMS}	14	21	28	35	42	56	63	70	Volts
Maximum DC Blocking Voltage		V _{DC}	20	30	40	50	60	80	90	100	Volts
Maximum Average Forward Rectified Current at T _L see figure 1 T _L =105°C		I _(AV)	2.0								Amps
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load (JEDEC method)		I _{FSM}	50								Amps
Maximum Instantaneous Forward Voltage @ 2.0A(Note1)		V _F	0.55			0.70		0.85			Volts
Maximum DC Reverse Current at rated DC Blocking Voltage per element	T _A = 25°C	I _R	0.5								mA
	T _A = 100°C		20.0			10.0					
Typical Thermal Resistance (Note 2)		R _{θJA}	55								°C/W
		R _{θJL}	12								
Operating Junction Temperature		T _J	-55 to +125								°C
Storage Temperature Range		T _{STG}	-55 to +125								°C

Notes:


1. Pulse test: 300 μs pulse width, 1% duty cycle
2. PCB mounted with 0.2" \times 0.2" (5.0mm \times 5.0mm) copper pads




F1G.1-FORWARD CURRENT
DERATING CURVE

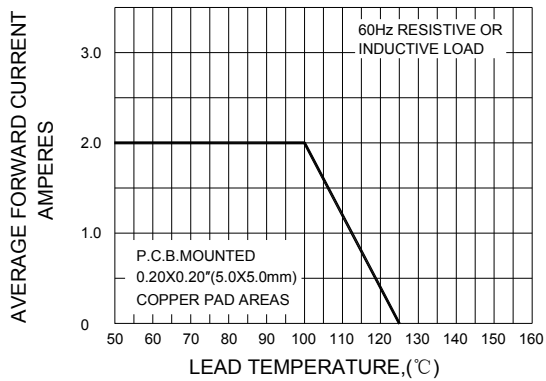


F1G.2-MAXIMUM NON-REPETITIVE PEAK
FORWARD SURGE CURRENT

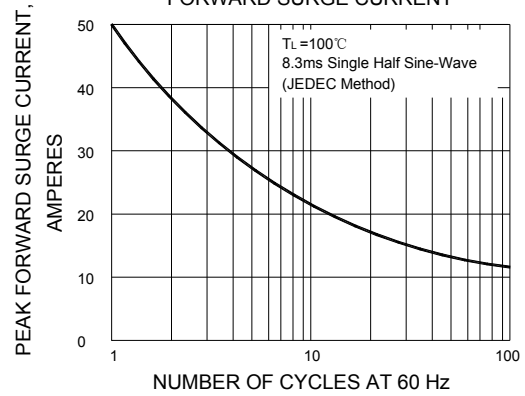

F1G.3-TYPICAL INSTANTANEOUS
FORWARD CHARACTERISTICS

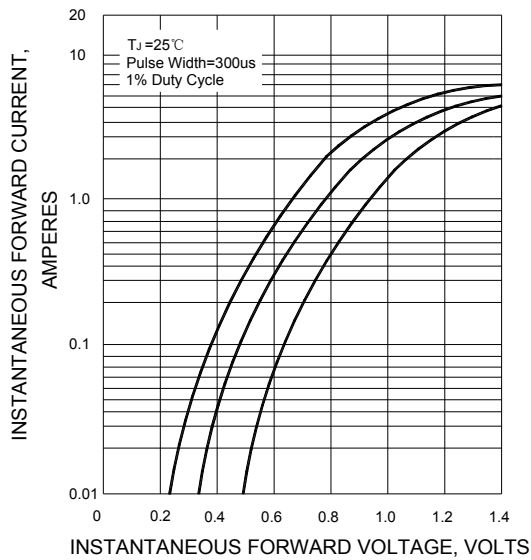

F1G.4-TYPICAL REVERSE CHARACTERISTICS

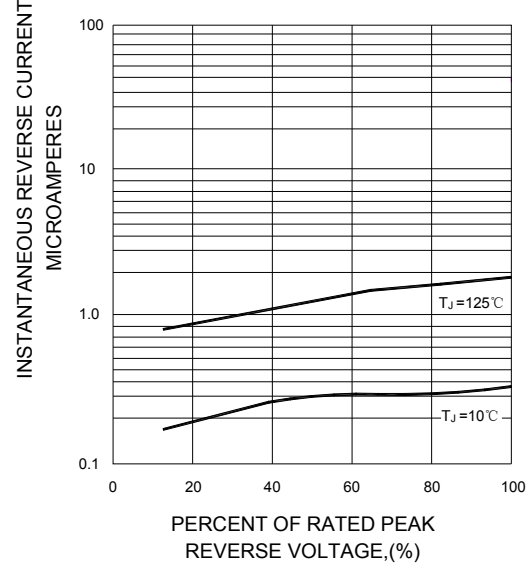

F1G.5-TYPICAL JUNCTION CAPACITANCE

