

TRANSISTOR (NPN)


FEATURES

Power dissipation

MARKING: Y11

MAXIMUM RATINGS (T_a=25°C unless otherwise noted)

Symbol	Parameter	Value	Unit
V _{CB0}	Collector-Base Voltage	40	V
V _{CE0}	Collector-Emitter Voltage	25	V
V _{EBO}	Emitter-Base Voltage	6	V
I _C	Collector Current	800	mA
P _C	Collector Power Dissipation	200	mW
R _{θJA}	Thermal Resistance From Junction To Ambient	625	°C/W
T _J	Junction Temperature	150	°C
T _{stg}	Storage Temperature	-55~+150	°C

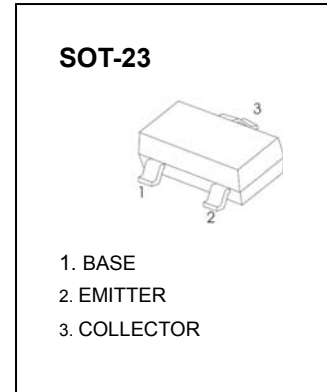

ELECTRICAL CHARACTERISTICS (T_a=25°C unless otherwise specified)

Parameter	Symbol	Test conditions	Min	Max	Unit
Collector-base breakdown voltage	V _{(BR)CBO}	I _C =100μA, I _E =0	40		V
Collector-emitter breakdown voltage	V _{(BR)CEO} *	I _C =1mA, I _B =0	25		V
Emitter-base breakdown voltage	V _{(BR)EBO}	I _E =100μA, I _C =0	6		V
Collector cut-off current	I _{CBO}	V _{CB} = 35V, I _E =0		0.1	μA
Collector cut-off current	I _{CEO}	V _{CE} = 20V, I _B =0		0.1	μA
DC current gain	h _{FE(1)}	V _{CE} =1V, I _C =5mA	45		
	h _{FE(2)}	V _{CE} =1V, I _C =100mA	80	400	
	h _{FE(3)}	V _{CE} =1V, I _C =800mA	40		
Collector-emitter saturation voltage	V _{CE(sat)}	I _C = 800mA, I _B =80mA		0.5	V
Base-emitter saturation voltage	V _{BE(sat)}	I _C =800mA, I _B = 80mA		1.2	V
Transition frequency	f _T	V _{CE} =6V, I _C = 20mA, f=30MHz	150		MHz








* Pulse Test : pulse width ≤ 300μs , duty cycle ≤2%.

CLASSIFICATION OF h_{FE(2)}


Rank	L	H
Range	80-300	300-400



Typical Characteristics

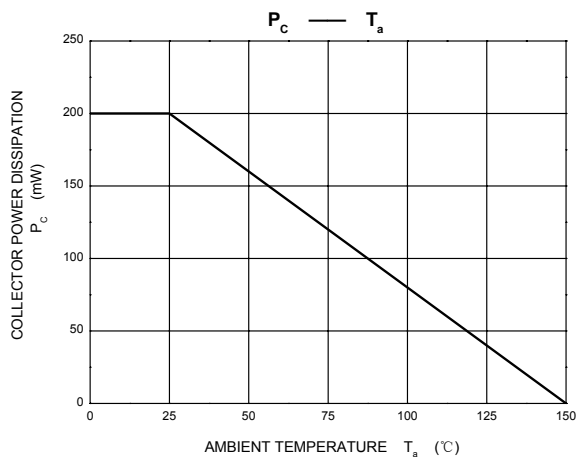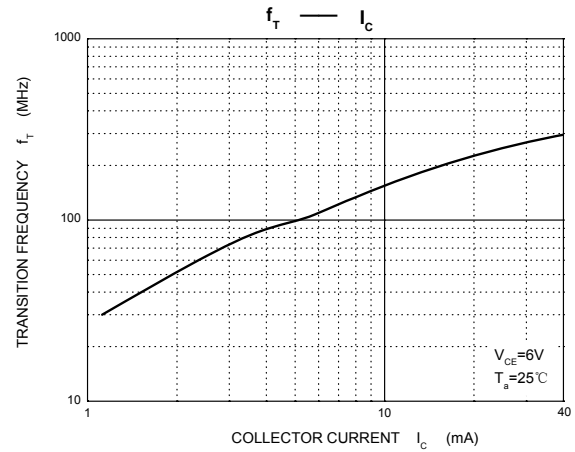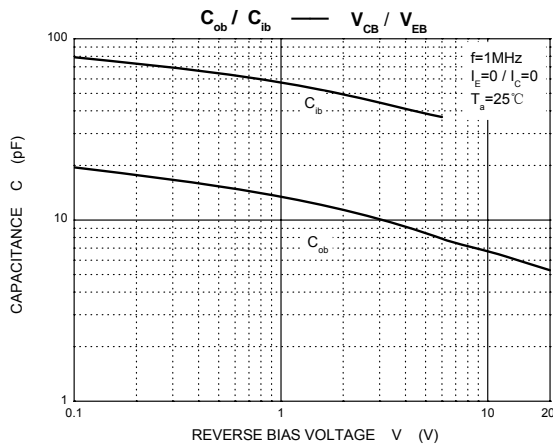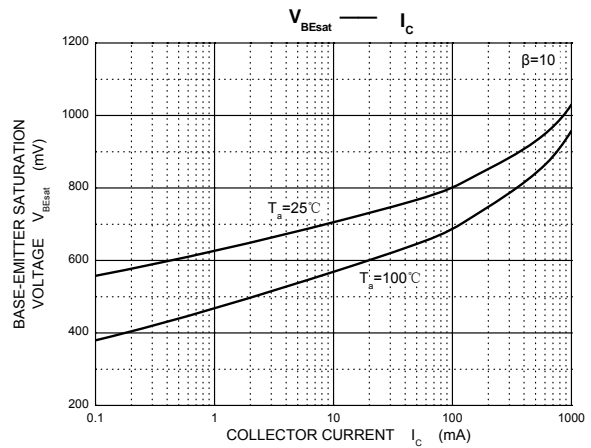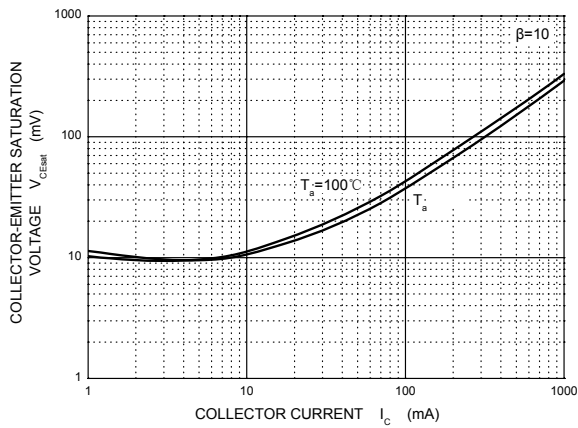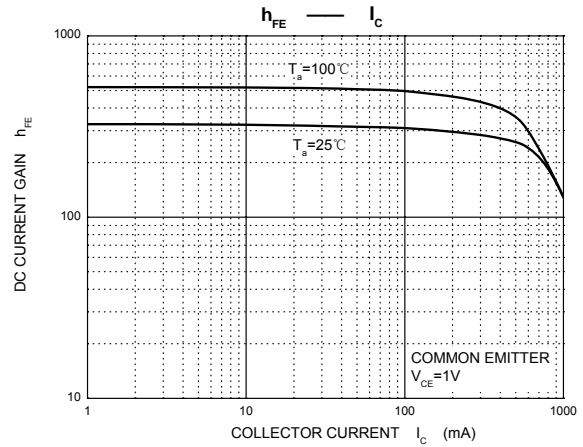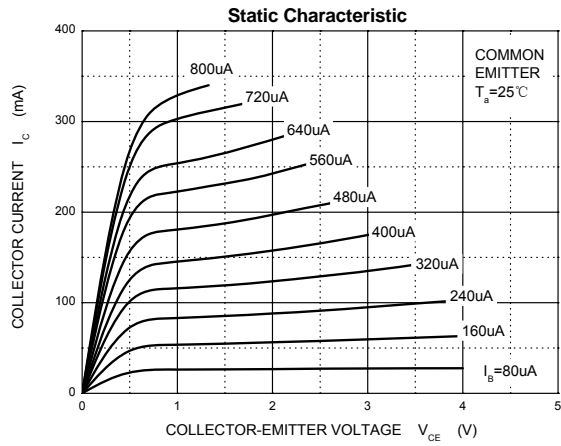


SOT-23 Package Outline Dimensions

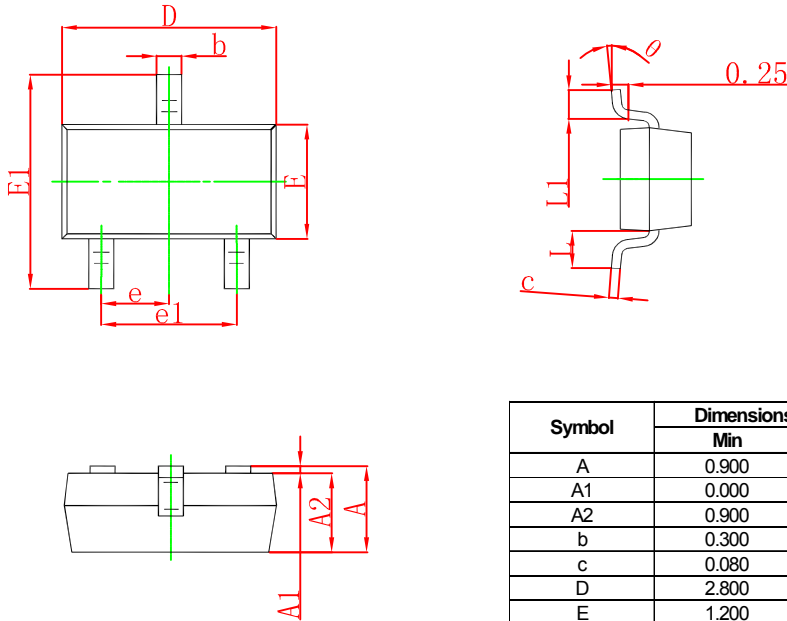

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.080	0.150	0.003	0.006
D	2.800	3.000	0.110	0.118
E	1.200	1.400	0.047	0.055
E1	2.250	2.550	0.089	0.100
e	0.950 TYP		0.037 TYP	
e1	1.800	2.000	0.071	0.079
L	0.550 REF		0.022 REF	
L1	0.300	0.500	0.012	0.020
θ	0°	8°	0°	8°

SOT-23 Suggested Pad Layout

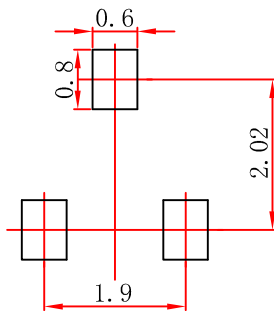

- Note:
1. Controlling dimension: in millimeters.
 2. General tolerance: ± 0.05mm.
 3. The pad layout is for reference purposes only.