

## 200mA Low Consumption Linear Regulator

BL8064 series is a group of positive voltage output, low power consumption, low dropout voltage, three terminal regulator. It can provide 200mA output current when input / output voltage differential drops to 430mV ( $V_{out} = 2.8V$ ), The very low power consumption of BL8064 ( $I_q = 1.0\mu A$ ) can greatly improve natural life of

BL8064 can provide output value in the range of 1.1V~5.5V in 0.1V steps. It also can be customized on command.

BL8064 includes high accuracy voltage reference, error amplifier, current limit circuit and output driver module.

BL8064 has well load transient response and good temperature characteristic, And it uses trimming technique to guarantee output voltage accuracy within  $\pm 2\%$ .


## FEATURES

- Low Power Consumption:  $1.0\mu A$  (Typ.)
- Maximum Output Current: 200mA
- Small Dropout Voltage
- 210mV@100mA ( $V_{out} = 2.8V$ )
- 430mV@200mA ( $V_{out} = 2.8V$ )
- Input Voltage Range: 1.5V~8V
- Output Voltage Range: 1.1V~5.5V (customized on command in 0.1V steps)
- Highly Accurate:  $\pm 2\%$  ( $\pm 1\%$  customized)
- Output Current Limit

## APPLICATIONS


- Battery Powered equipment
- Power Management of MP3、PDA、DSC、Mouse、PS2 Games
- Reference Voltage Source Regulation after Switching Power

## TYPICAL APPLICATION

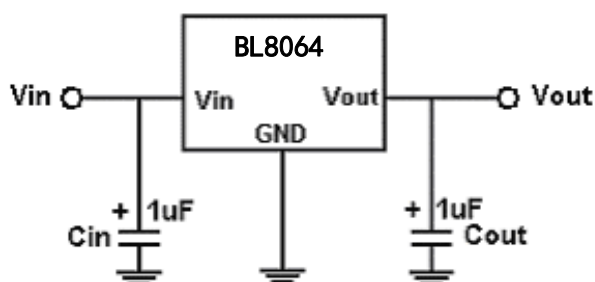

**Note:** Input capacitor ( $C_{in} = 1\mu F$ ) and Output capacitor ( $C_{out} = 1\mu F$ ) are recommended in all application circuit. Ceramic capacitor is recommended.

## ELECTRICAL CHARACTERISTICS

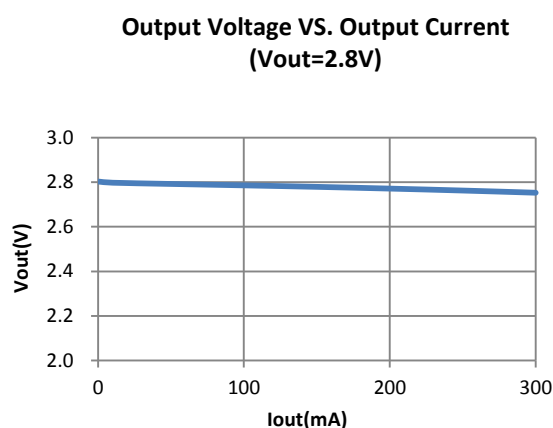

## ORDERING INFORMATION

BL8064 1 2 3 4 5

Code	Description
1	Temperature&Rohs: C:-40~85°C ,Pb Free Rohs Std.
2	Package type: B3:SOT-23-3 B3A:TSOT-23 B5:SOT-23-5 C3:SOT-89-3 H:TO-92
3	Packing type: TR:Tape&Reel (Standard) BG:Bag (TO-92)
4	Output voltage: e.g. 11=1.1V 15=1.5V 55=5.5V
5	Voltage accuracy: 1=±1% Blank(default)=±2%



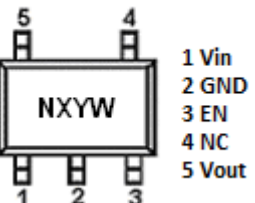
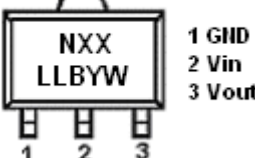

## MARKING DEScriptON

Output Voltage Code

VOUT	Code	VOUT	Code	VOUT	Code
1.2V	2	3.0V	0	4.4V	4
1.3V	3	3.1V	1	4.5V	5
1.5V	5	3.2V	2	4.6V	6
1.8V	8	3.3V	3	4.7V	7
2.0V	0	3.4V	4	4.8V	8
2.1V	1	3.5V	5	4.9V	9
2.2V	2	3.6V	6	5.0V	0
2.3V	3	3.7V	7	5.1V	1
2.4V	4	3.8V	8	5.2V	2
2.5V	5	3.9V	9	5.3V	3
2.6V	6	4.0V	0	5.4V	4
2.7V	7	4.1V	1	5.5V	5
2.8V	8	4.2V	2		
2.9V	9	4.3V	3		

Y: The Year of manufacturing, "1" stands for year 2011, "2" stands for year 2012, and "8" stands for year 2018.  
W: The week of manufacturing. "A" stands for week 1, "Z" stands for week 26, "A" stands for week 27, "Z" stands for week 52.

## PIN CONFIGURATION

Product Classification		BL8064CB3TR□□
Marking		SOT-23-3
NXYW	N:Product Code	
	X:Output Voltage	
	YW: Date Code	
Product Classification		BL8064CB3ATR□□
Marking		TSOT-23
NXYW	N:Product Code	
	X:Output Voltage	
	YW: Date Code	
Product Classification		BL8064CB5TR□□
Marking		SOT-23-5
NXYW	N:Product Code	
	X:Output Voltage	
	YW: Date Code	
Product Classification		BL8064CC3TR□□
Marking		SOT-89-3
NXX LLBYW	N:Product Code	
	XX:Output Voltage	
	LL:LOT NO.	
	B:FAB Code	
Product Classification		BL8064CHBG□□
Marking		TO-92
NXX LLBYW	N:Product Code	
	XX:Output Voltage	
	LL:LOT NO.	
	B:FAB Code	
GND		Ground Pin
Vin		Supply Voltage Input
Vout		Output Voltage
EN		Chip Enable
NC		No Connection



## ABSOLUTE MAXIMUM RATING

Parameter		Value
Max Input Voltage		10V
Operating Junction Temperature(Tj)		125°C
Ambient Temperature(Ta)		-40°C -85°C
Power Dissipation	SOT-23-3	250mW
	TSOT-23	250mW
	SOT-23-5	250mW
	SOT-89-3	500mW
	TO-92	500mW
Storage Temperature(Ts)		-40°C -150°C
Lead Temperature & Time		260°C,10S

### Note:

Exceed these limits to damage to the device.

Exposure to absolute maximum rating conditions may affect device reliability.

## RECOMMENDED WORK CONDITIONS


Item	Min	Recommended	Max.	Unit
Input Voltage Range			8	V
Ambient Temperature	-40		85	°C

## ELECTRICAL CHARACTERISTICS

(Test Conditions: Cin=1uF, Cout=1uF, TA=25°C, Unless Otherwise Specified)

Symbol	Parameter	Conditions		Min	Type	Max	Units
Vin	Input Voltage					8	V
Vout	Output Voltage			Vout x0.98		Vout x1.02	V
Iout(Max.)	Maximum Output Current	Vin-Vout=1V		200			mA
Dropout Voltage	Input-Output Voltage Differential	Iout=100mA	Vout ≤ 1.8V		600	1000	mV
			Vout ≥ 1.8V		300	600	
$\frac{\Delta V_{out}}{\Delta V_{in} \cdot V_{out}}$	Line Regulation	Iout=10mA 1.5V≤Vin≤8V			0.2	0.3	%/V
$\Delta V_{out}$	Load Regulation	Vin=Set Vout+1V 1mA≤Iout≤100mA			20	40	mV
Iq	Quiescent Current	Vin=Set Vout+1V			1.0	5.0	uA
$\frac{\Delta V_{out}}{\Delta T \cdot V_{out}}$	Output Voltage Temperature Coefficient	Iout=10mA			100		ppm/°C
Venh	CE Input Voltage "H"			1.5		Vin	V
Venl	CE Input Voltage "L"			0		0.2	V

## BLOCK DIAGRAM

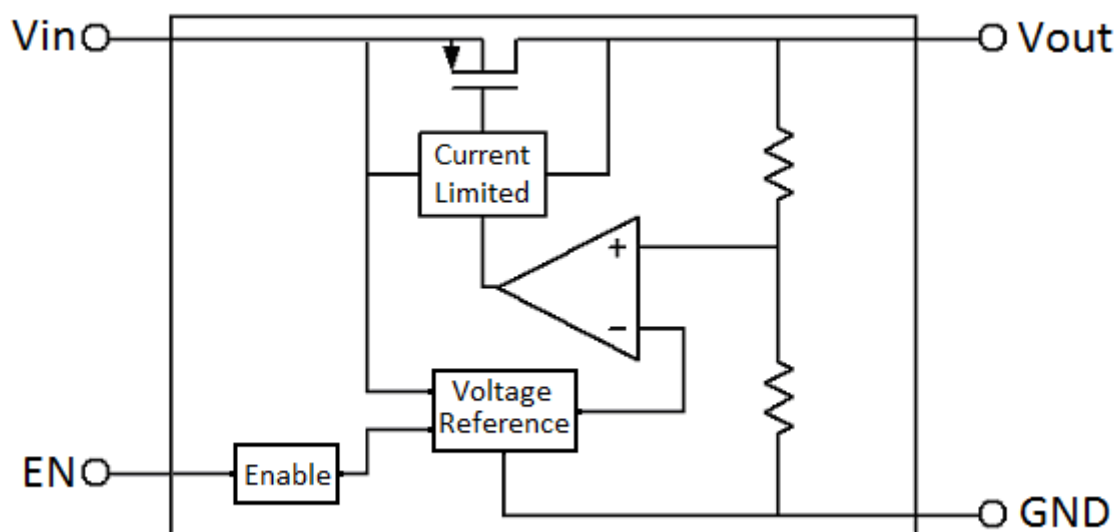

## EXPLANATION


BL8064 is a series of low dropout voltage and low power consumption three pins regulator. Its application circuit is very simple, which only needs two outside capacitors. It is composed of these modules: high accuracy voltage reference, current limit circuit, error amplifier, output driver and power transistor.

Current Limit module can keep chip and power system away from danger when load current is more than 200mA.


BL8064 uses trimming technique to assure the accuracy of output value within  $\pm 2\%$ , at the same time, temperature compensation is elaborately considered in this chip, which makes BL8064's temperature coefficient within 100ppm/ $^{\circ}\text{C}$ .

## TYPICAL PERFORMANCE CHARACTERISTICS


### 1. Load regulation ( $V_{in}=4V$ )

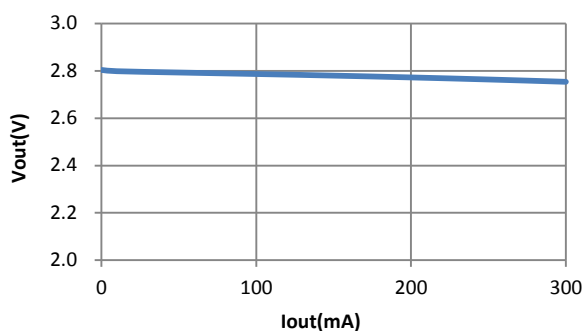


### 2. Line regulation

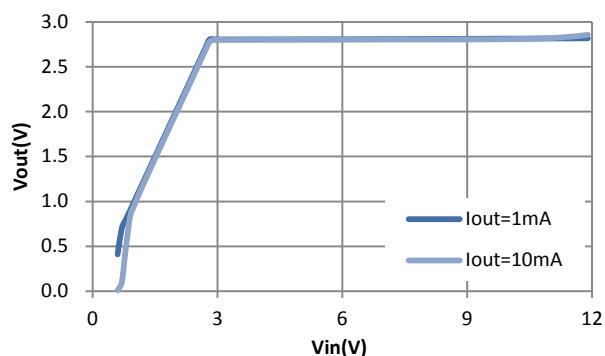


### 3. Dropout Voltage

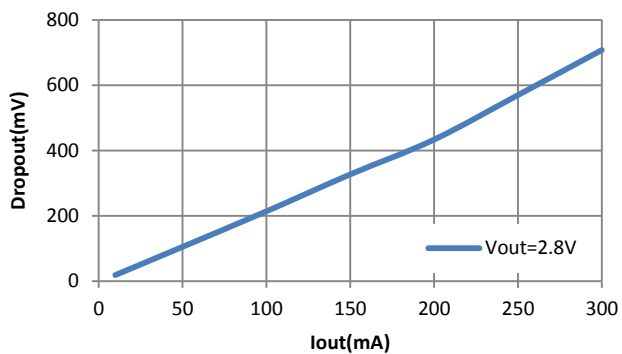


### 4. PSRR

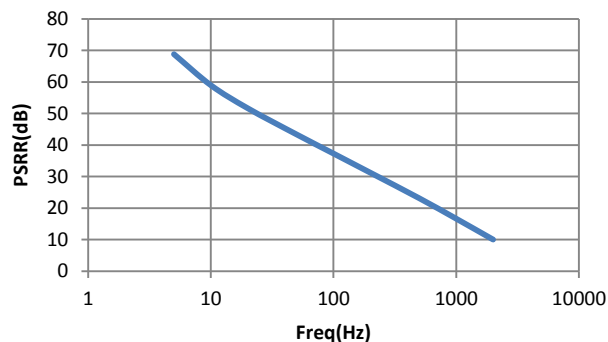

### 5. $I_q$ ( $V_{out}=2.8V$ )

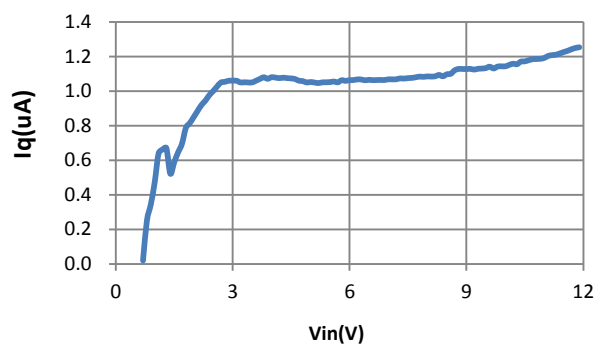


### 6. Current limit

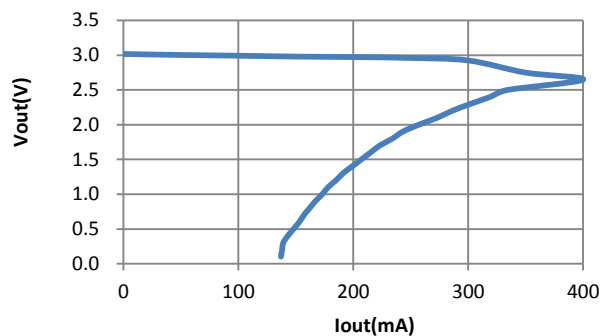


7. Line transient response

Cin=Cout=1uF Iout=10mA Vout=2.8V

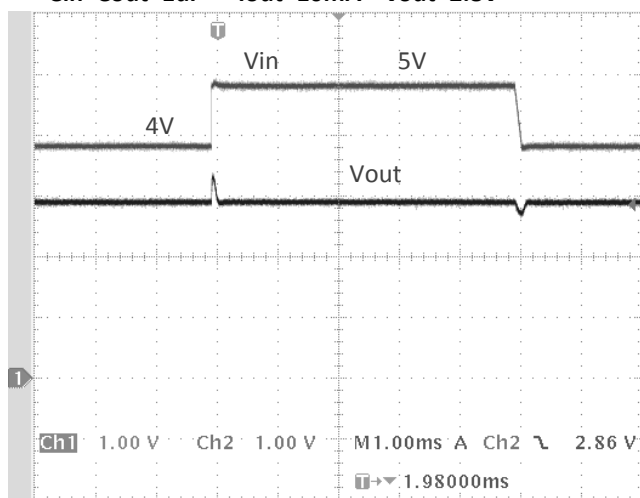


8. Load transient response

Cin=Cout=1uF Vin=4V Vout=2.8V

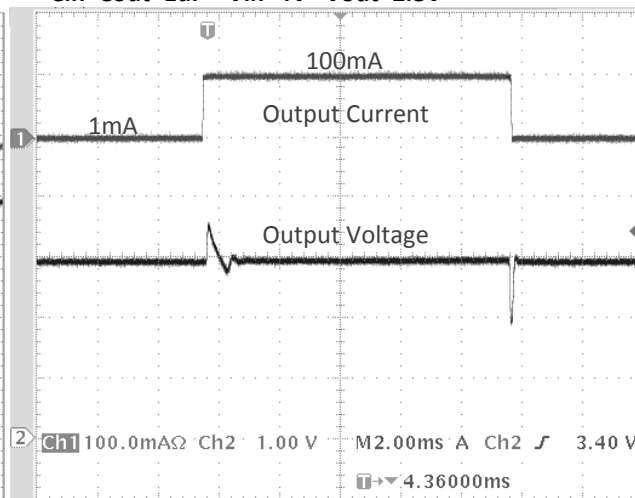

9. Start up

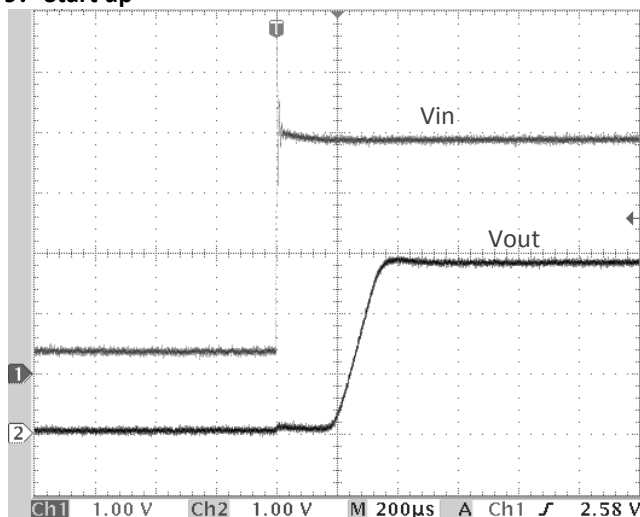

## PACKAGE LINE

[illegible]

Package	TSOT-23-5	Devices per reel	3000Pcs	Unit	mm
---------	-----------	------------------	---------	------	----

Package Dimension:

Top View Dimensions:

- Overall width:  $2.9 \pm 0.2$
- Distance between pins 1 and 2:  $0.4 \pm 0.1$
- Distance between pins 2 and 3:  $0.4 \pm 0.1$
- Distance between pins 4 and 5:  $1.9 \pm 0.2$
- Pin 1 width:  $0.95$
- Pin 2 width:  $0.95$
- Pin 3 width:  $0.95$
- Pin 4 width:  $0.95$
- Pin 5 width:  $0.95$
- Pin 1 height:  $1.6^{+0.2}_{-0.1}$
- Pin 2 height:  $1.6^{+0.2}_{-0.1}$
- Pin 3 height:  $1.6^{+0.2}_{-0.1}$
- Pin 4 height:  $1.6^{+0.2}_{-0.1}$
- Pin 5 height:  $1.6^{+0.2}_{-0.1}$
- Pin 1 length:  $2.8 \pm 0.3$
- Pin 2 length:  $2.8 \pm 0.3$
- Pin 3 length:  $2.8 \pm 0.3$
- Pin 4 length:  $2.8 \pm 0.3$
- Pin 5 length:  $2.8 \pm 0.3$

Side View Dimensions:


- Overall height:  $1.1^{+0.2}_{-0.1}$
- Pin 1 height:  $0.8 \pm 0.1$
- Pin 2 height:  $0.8 \pm 0.1$
- Pin 3 height:  $0.8 \pm 0.1$
- Pin 4 height:  $0.8 \pm 0.1$
- Pin 5 height:  $0.8 \pm 0.1$
- Pin 1 length:  $0.15^{+0.1}_{-0.05}$
- Pin 2 length:  $0.15^{+0.1}_{-0.05}$
- Pin 3 length:  $0.15^{+0.1}_{-0.05}$
- Pin 4 length:  $0.15^{+0.1}_{-0.05}$
- Pin 5 length:  $0.15^{+0.1}_{-0.05}$
- Pin 1 width:  $0.2 \text{ MIN.}$
- Pin 2 width:  $0.2 \text{ MIN.}$
- Pin 3 width:  $0.2 \text{ MIN.}$
- Pin 4 width:  $0.2 \text{ MIN.}$
- Pin 5 width:  $0.2 \text{ MIN.}$

Bottom View Dimensions:

- Overall width:  $4.5 \pm 0.1$
- Distance between pins 1 and 2:  $1.6 \pm 0.2$
- Distance between pins 2 and 3:  $1.6 \pm 0.2$
- Pin 1 width:  $0.42 \pm 0.2$
- Pin 2 width:  $0.42 \pm 0.2$
- Pin 3 width:  $0.42 \pm 0.2$
- Pin 1 height:  $0.42 \pm 0.2$
- Pin 2 height:  $0.42 \pm 0.2$
- Pin 3 height:  $0.42 \pm 0.2$
- Pin 1 length:  $1.5 \pm 0.1$
- Pin 2 length:  $1.5 \pm 0.1$
- Pin 3 length:  $1.5 \pm 0.1$
- Pin 1 width:  $0.47 \pm 0.1$
- Pin 2 width:  $0.47 \pm 0.1$
- Pin 3 width:  $0.47 \pm 0.1$
- Pin 1 height:  $0.47 \pm 0.1$
- Pin 2 height:  $0.47 \pm 0.1$
- Pin 3 height:  $0.47 \pm 0.1$
- Pin 1 length:  $0.42 \pm 0.2$
- Pin 2 length:  $0.42 \pm 0.2$
- Pin 3 length:  $0.42 \pm 0.2$
- Pin 1 width:  $0.42 \pm 0.2$
- Pin 2 width:  $0.42 \pm 0.2$
- Pin 3 width:  $0.42 \pm 0.2$
- Pin 1 height:  $0.42 \pm 0.2$
- Pin 2 height:  $0.42 \pm 0.2$
- Pin 3 height:  $0.42 \pm 0.2$
- Pin 1 length:  $1.5 \pm 0.1$
- Pin 2 length:  $1.5 \pm 0.1$
- Pin 3 length:  $1.5 \pm 0.1$
- Pin 1 width:  $0.47 \pm 0.1$
- Pin 2 width:  $0.47 \pm 0.1$
- Pin 3 width:  $0.47 \pm 0.1$
- Pin 1 height:  $0.47 \pm 0.1$
- Pin 2 height:  $0.47 \pm 0.1$
- Pin 3 height:  $0.47 \pm 0.1$
- Pin 1 length:  $0.42 \pm 0.2$
- Pin 2 length:  $0.42 \pm 0.2$
- Pin 3 length:  $0.42 \pm 0.2$
- Pin 1 width:  $0.42 \pm 0.2$
- Pin 2 width:  $0.42 \pm 0.2$
- Pin 3 width:  $0.42 \pm 0.2$
- Pin 1 height:  $0.42 \pm 0.2$
- Pin 2 height:  $0.42 \pm 0.2$
- Pin 3 height:  $0.42 \pm 0.2$
- Pin 1 length:  $1.5 \pm 0.1$
- Pin 2 length:  $1.5 \pm 0.1$
- Pin 3 length:  $1.5 \pm 0.1$
- Pin 1 width:  $0.47 \pm 0.1$
- Pin 2 width:  $0.47 \pm 0.1$
- Pin 3 width:  $0.47 \pm 0.1$
- Pin 1 height:  $0.47 \pm 0.1$
- Pin 2 height:  $0.47 \pm 0.1$
- Pin 3 height:  $0.47 \pm 0.1$
- Pin 1 length:  $0.42 \pm 0.2$
- Pin 2 length:  $0.42 \pm 0.2$
- Pin 3 length:  $0.42 \pm 0.2$
- Pin 1 width:  $0.42 \pm 0.2$
- Pin 2 width:  $0.42 \pm 0.2$
- Pin 3 width:  $0.42 \pm 0.2$
- Pin 1 height:  $0.42 \pm 0.2$
- Pin 2 height:  $0.42 \pm 0.2$
- Pin 3 height:  $0.42 \pm 0.2$
- Pin 1 length:  $1.5 \pm 0.1$
- Pin 2 length:  $1.5 \pm 0.1$
- Pin 3 length:  $1.5 \pm 0.1$
- Pin 1 width:  $0.47 \pm 0.1$
- Pin 2 width:  $0.47 \pm 0.1$
- Pin 3 width:  $0.47 \pm 0.1$
- Pin 1 height:  $0.47 \pm 0.1$
- Pin 2 height:  $0.47 \pm 0.1$
- Pin 3 height:  $0.47 \pm 0.1$
- Pin 1 length:  $0.42 \pm 0.2$
- Pin 2 length:  $0.42 \pm 0.2$
- Pin 3 length:  $0.42 \pm 0.2$
- Pin 1 width:  $0.42 \pm 0.2$
- Pin 2 width:  $0.42 \pm 0.2$
- Pin 3 width:  $0.42 \pm 0.2$
- Pin 1 height:  $0.42 \pm 0.2$
- Pin 2 height:  $0.42 \pm 0.2$
- Pin 3 height:  $0.42 \pm 0.2$
- Pin 1 length:  $1.5 \pm 0.1$
- Pin 2 length:  $1.5 \pm 0.1$
- Pin 3 length:  $1.5 \pm 0.1$
- Pin 1 width:  $0.47 \pm 0.1$
- Pin 2 width:  $0.47 \pm 0.1$
- Pin 3 width:  $0.47 \pm 0.1$
- Pin 1 height:  $0.47 \pm 0.1$
- Pin 2 height:  $0.47 \pm 0.1$
- Pin 3 height:  $0.47 \pm 0.1$
- Pin 1 length:  $0.42 \pm 0.2$
- Pin 2 length:  $0.42 \pm 0.2$
- Pin 3 length:  $0.42 \pm 0.2$
- Pin 1 width:  $0.42 \pm 0.2$
- Pin 2 width:  $0.42 \pm 0.2$
- Pin 3 width:  $0.42 \pm 0.2$
- Pin 1 height:  $0.42 \pm 0.2$
- Pin 2 height:  $0.42 \pm 0.2$
- Pin 3 height:  $0.42 \pm 0.2$
- Pin 1 length:  $1.5 \pm 0.1$
- Pin 2 length:  $1.5 \pm 0.1$
- Pin 3 length:  $1.5 \pm 0.1$
- Pin 1 width:  $0.47 \pm 0.1$
- Pin 2 width:  $0.47 \pm 0.1$
- Pin 3 width:  $0.47 \pm 0.1$
- Pin 1 height:  $0.47 \pm 0.1$
- Pin 2 height:  $0.47 \pm 0.1$
- Pin 3 height:  $0.47 \pm 0.1$
- Pin 1 length:  $0.42 \pm 0.2$
- Pin 2 length:  $0.42 \pm 0.2$
- Pin 3 length:  $0.42 \pm 0.2$
- Pin 1 width:  $0.42 \pm 0.2$
- Pin 2 width:  $0.42 \pm 0.2$
- Pin 3 width:  $0.42 \pm 0.2$
- Pin 1 height:  $0.42 \pm 0.2$
- Pin 2 height:  $0.42 \pm 0.2$
- Pin 3 height:  $0.42 \pm 0.2$
- Pin 1 length:  $1.5 \pm 0$



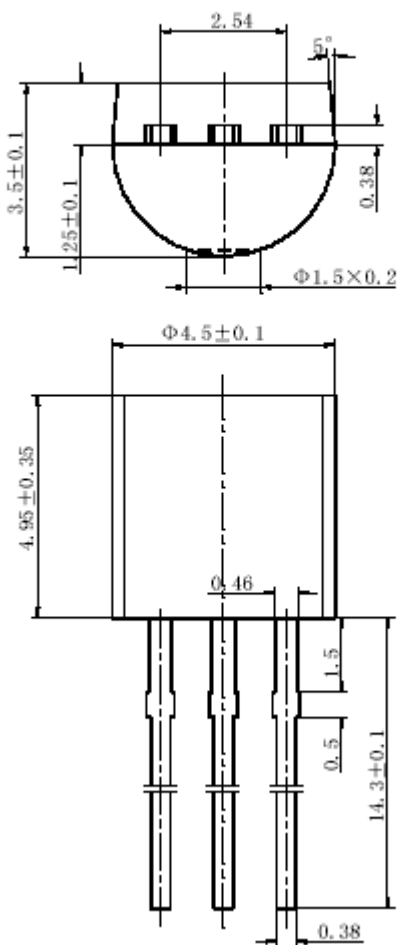

Package	TO-92	Devices per Bag	1000Pcs	Unit	mm
<div>Package Dimension:</div> <div>TO-92</div>  <p>The technical drawing shows two views of a TO-92 package. The top view is a semi-circular shape with a diameter of <math>\Phi 4.5 \pm 0.1</math> mm. It features three pins on one side, each with a width of <math>1.25 \pm 0.1</math> mm. The distance between the pins is <math>2.54</math> mm. The total width of the package is <math>3.5 \pm 0.1</math> mm. The bottom view shows the package from the side, with a total height of <math>4.95 \pm 0.35</math> mm. The pins are <math>1.5</math> mm high and <math>0.5</math> mm wide. The distance between the pins is <math>14.3 \pm 0.1</math> mm. The package has a <math>0.38</math> mm wide base and a <math>0.46</math> mm wide top section. A <math>0.38</math> mm wide section is also indicated at the bottom right.</p>					